



## 2C22 Electrical Interface Module




The 2C22 Module provides electrical interface to the PROFIBUS-DP Protocol by conditioning the electrical signals supplied to and from the PROFIBUS wire-cable network for transmission over fiber optic cable.

The basic modem configuration consists of a Power Supply, an Electrical Interface, and an Optical Interface Module. Additional modules may be added to configure Daisy Chain, Star, Self-Healing Ring topologies and provide redundancy. A maximum combination of five optical or electrical modules may be connected together in one modem, inter-module communications and operating power is achieved through the integrated module BUS connections.

### SPECIFICATIONS

#### Mechanical:

Mounting: 35mm DIN Rail  
Weight: < 9oz ( 250g )

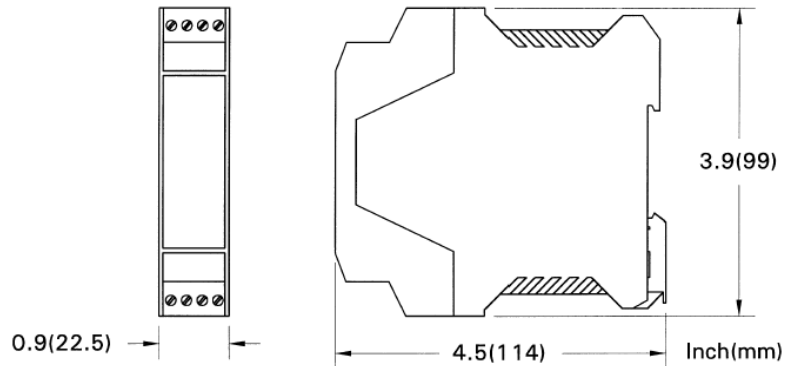

#### Power Requirements:

7.5Vdc @ 200mA max, via the BUS interconnections  
(any of the EOTec 2000 power supply modules)

#### PROFIBUS Conformance:

Conforms to PROFIBUS-DP wire-cable network specifications and requirements

#### Data Rates

(Auto negotiated):

9.6K, 19.2K, 93.75K, 187.5K, 500K, 1.5M, 3.0M, 6.0M and 12.0M bps

#### Wire-Cable Connection:

Unit has a standard PROFIBUS 9-pin D-sub female connector

#### Maximum Nodes/Wire Length:

Conforms to PROFIBUS wire-cable specifications,  
all PROFIBUS requirements for wire-cable networks apply

#### Fiber Optic Compatability:


Proprietary fiber network, conformity with other manufacturer's products is neither expressed nor implied

#### LED Indicators:

Power - Green  
Communications activity - Amber

#### Ambient Conditions:

-40°C to 85°C Operational  
5 to 90% Relative humidity non-condensing



Weed Instrument, P.O. Box 300, Round Rock, Texas 78680  
Shipping: 707 Jeffrey Way, Round Rock, TX 78664  
Phone: (512) 434-2850, Toll Free: (800) 880-9333, Fax: (512) 434-2851  
Mail: [fiberop@weedinstrument.com](mailto:fiberop@weedinstrument.com)  
Home Page: <http://www.weedinstrument.com>