

2A08 Power Supply Module



The 2A08 Power Supply Module supplies operating power to the EOTec 2000 Modem.


The basic modem configuration consists of a Power Supply Module, Electrical Interface Module, and an Optical Interface Module. However, additional Power Supply modules may be added to address Redundant Power Supply applications. A maximum combination of five optical or electrical modules may be powered from one supply, inter-module communications and operating power is achieved through the integrated module backplane connections.

SPECIFICATIONS

Mechanical:

Mounting: 35mm DIN Rail

Weight: < 9oz (250g)

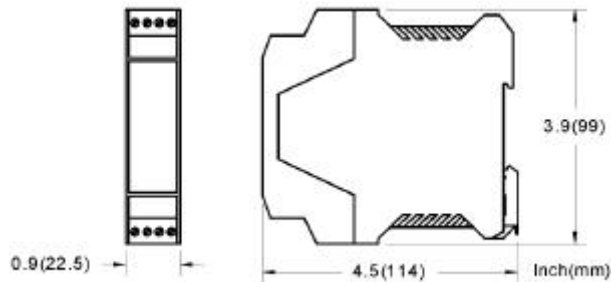

Input Power Range: 24Vdc +/- 20%@400mA

Operating Power Output: Regulated 9Vdc, 1.1A Max

Input Connection: Pluggable, Screw Terminal Block
12 to 24 AWG Cage-Clamp

Input Fuse Type: 400 mA slow-blow

Power On Indicator: Green LED

Ambient Conditions: -40°C to 85°C Operational
0 to 90% Relative Humidity Non-Condensing



Approved
Class I, Division 2,
Groups A, B, C & D

