

PPC

PS6508-PPC

Pentium® M High Performance 15" Panel PC

Features and Benefits:

- Pentium® M / Celeron® M high performance platform
- Ultra slim Panel PC
- 15" LCD display with ELO 5-wire resistive or ELO surface capacitive touch screen
- Supports CF Type I/II socket
- VESA 100 Wall mounting standard
- Optional MSR & Smart Card reader
- Ideal system to be floor-stand kiosk



Ultra slim



**WEPOS
Ready**



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw

<http://www.protech.com.tw>




ISO CERTIFIED
9001 14001

PS6508-PPC

Pentium® M High Performance 15" Panel PC


Front View

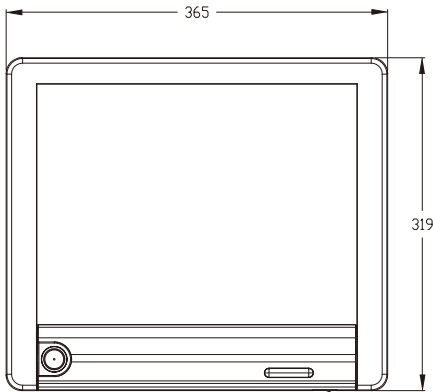

Side View



I/O View

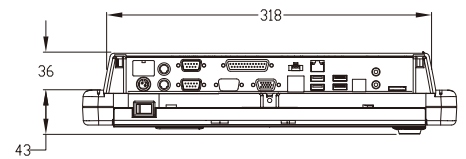

Unit: mm

Specification

System	
CPU Support	Intel® Celeron® M 1.5GHz CPU (up to Pentium® M 1.8GHz)
Memory	1 x DDR2 SO-DIMM Slot, 512MB DDR2 SO-DIMM (up to 1GB)
Core Logic	Intel® 910GMLE & ICH6M
Network	10/100Base-T Fast Ethernet
Audio	AC '97 Codec with internal mono speaker (2watt x 1)
Power Supply	120W Power adapter
System Weight	5.5 kg
Dimension (WxHxD)	365 x 318.5 x 70 mm (14.37" x 12.54" x 2.76")
Mounting Type	Support VESA 100 standard
O.S. Compliant	Windows XP / XPE, Linux, WEPOS

Storage

HDD	1 x 2.5" SATA HDD (standard over 80GB)
CF	1 x bootable Compact Flash slot for CF type I/II storage (optional)

I/O Ports

USB	4 x USB 2.0 ports
Serial Ports	3 x DB-9 (COM 1/2/3), 1 x RJ-45 (COM 4), +5/12V Selectable
Parallel	1 x Parallel port (SPP / EPP / ECP)
PS/2	2 x PS/2 ports
LAN	1 x 10/100Mbps
VGA	1 x DB-15 VGA Interface
Audio	1 x Line-out, 1 x Mic-in Audio Jack

Display

LCD	15" TFT LCD
Max. Resolution	1024 x 768
Brightness	250 cd/m ²
Touch Screen	5- wire analog resistive / Surface capacitive
Viewing Angle	0 ~ 60 degree

Environment

EMC & Safety	CE, FCC
Operating Temp.	0° ~ 35°C
Storage Temp.	-20° ~ 60°C
Humidity	20% ~ 90%

Ordering Information

PS6508-PPC	15" Panel PC with Celeron® M 1.5GHz CPU, 512MB DDR2 SO-DIMM, 80GB HDD
i-Button	Read only, output through PS/2 KB interface
MSR	JIS-I or II, ISO Track1+2+3, PS/2 KB interface
CF Adaptor	Bootable Compact Flash slot for CF type I/II storages
Color	Black
OS	Windows XP / XPE, WEPOS, Linux
Smart card / Vertical MSR	Smart card reader + Vertical MSR, USB interface
WLAN Module	802.11 b/g wireless LAN

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in Feb. 2009.