

TECHNICAL DATA

max. transfer rate	115 kBd
recommended max. line length	1 200 m
galvanic separation	1 kV
optical isolation	2.5 kV
selectable terminator	100Ω
connector RS232c, PWR	screw
connector RS422	screw
overvoltage (soft) protection - RS422 side	600W/1ms
overvoltage (soft) protection – power supply	600W/1ms
power supply polarity inversion protection	diode
optical indication (LED)	red PWR
	yellow RxD
	green TxD
power supply	9 - 30 V DC
power consumption	max 1.1 W
dimensions	90 x 36 x 58mm

DIN 2.1/422*Isolated converter***RS 232c ↔ RS 422****CONDITIONS OF WARRANTY**

ComErgon Ltd. provides full warranty of 12 month for serial interface module DIN 2.1/422, starting on the day of purchase.

The warranty is except for the cases in which the functioning of the module has been affected by faulty manipulation, natural catastrophes or other external factors.




tel.: +421-2-4445 8783
tel./ fax.: +421-2-4425 9006

Pionierska 15, 831 02 Bratislava
Slovak Republic

e-mail: service@comergon.sk
http: www.comergon.sk

LAYOUT OF JUMPERS AND CONNECTORS

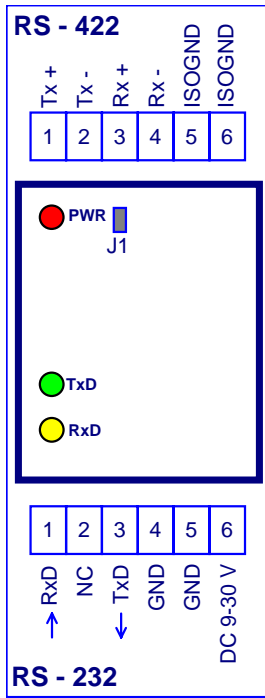

CONNECTION OF TWO MODULES

module 1	module 2
pin	pin
FULL DUPLEX	
(Tx +) 1	3 (Rx +)
(Tx -) 2	4 (Rx -)
(Rx -) 4	2 (Tx -)
(Rx +) 3	1 (Tx +)
ISO GND 5	5 ISO GND

SETTING OF OPERATIONAL MODES

JUMPER	PIN	FUNCTION
TERMINATOR		
J1	ON *	terminator 120 Ω
	OFF *	terminator disconnected

STANDARD SETTING

terminator

120 Ω