




ATM Cellular Gateway™

Cellular Connectivity For: ATM Machines

ISO Ready

- Easy & Fast Installation – Just Plug-it-in
- Processor Approved
- Fast Connection Times
- Eliminates phone lines (Reduce costs)
- Eliminates costly DSL lines
- Enables mobile ATM
- Supports all ATMs
- Security – Firewall and SSL built in
- Central management via Sixnet Gateway Management Utility
- Location tracking with optional GPS
- Automatic failover for Dial ATMs to DSL

Processor Approved

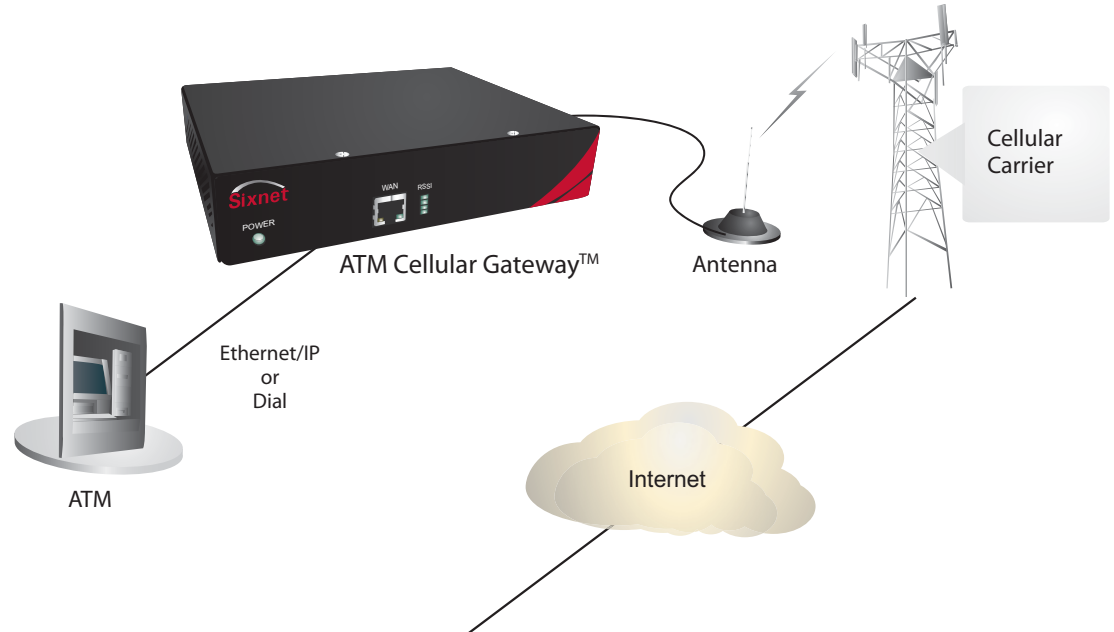

Approved Processors:	
• RBS World Pay - Lynk	• Columbus Data Systems
• Data Stream - ASAI	• Switch Commerce
• Elan	• Metavante

Configuration Service Available With:	
• Universal Money	• Star Financial Bank
• eFunds	• Elan
• Cash Depot - Satellite Receivers	

Most ATM Management Software supported

Key Benefits
• Reduced operating cost
• Improved management/control
• Faster transaction times
• Proven reliability

“Great ROI - Ability to use low data plans for reduced operating costs”

Specifications

Cellular Radio:	CDMA: 2G 1xRTT, 3G EDVO Rev A, GSM: 2G EDGE, 3G HSDPA
Interfaces:	One (1) Ethernet 10/100 Mbps, Autosensing RJ45, Console Port Optional Dial Tone RJ11
LEDs/Displays:	Signal Strength, Data send/receive, Power
Dimensions:	7" X 9" X 2"
Weight:	2lbs
Power:	110v USA, 220v International available
Security:	IPSec/VPN, SSL
IP:	IP Transparency, NAT-PAT, Stateful inspection firewall
Warranty:	1 year

Sixnet Gateway Management Utility (GMU)

Enterprise class management application provides ongoing visibility and management of a deployed network of ATM Cellular Gateways™ from a single console. Update firmware, distribute changes, and monitor critical elements (cellular signal strength, connectivity, etc.) without individual unit access.

GMU is available hosted or at your data center.

Making The Right Choice

ATM Cellular Gateways™ are available in many configurations to work with almost any ATM in use today. Choose your ATM connection type, cellular carrier, and network speed. We ship your Gateway ready and pre-configured so there is nothing to do except plug it into your ATM*.

Carrier	Ethernet/IP	Dial Port Models
2G Models	A-2200	A-2201
3G Models	A-2300	
AirCard	A-1100	A-1101

For Dial ATMs, choose 2G speed for best value. Carrier provided USB AirCard is also an option.

*Some processor configurations may incur a configuration charge.

Where to Purchase

Online at www.sixnet.com or
www.jbmelectronics.com
Call Sixnet (800) 489-7781