

NGZ 71

ON-delay multi-range time relay


- Multi-voltage for AC/DC 24 to 240 V
- 1 function, ON-delay
- Setting range from 0.1 s to 300 h divided into 16 switchable time ranges
- 1 changeover contact
- 2 LEDs for function display

Time ranges

Setting range from 0.1 s to 300 h divided into:


≤ 0.1 s	1 s	1.5 to 30 min
0.15 s	3 s	3 to 60 min
0.5 s	10 s	5 to 100 min
1.5 s	30 s	0.15 to 3 h
5 s	100 s	0.5 to 10 h
15 s	300 s	1.5 to 30 h
0.5 to 10 min	5 to 100 h	
50 to 1000 s	15 to 300 h	

Connection diagram



KS 250-1

Dimensions

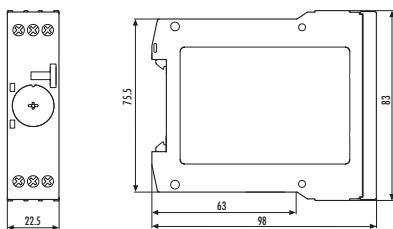

K 3-1


Ordering designation

NGZ 71

Price code: 38.1


Functions

Function code 11 = ON-delay



t_A = Operating time
 t_1 = Break time, must be > recovery time 1
 t_2 = Break time, must be > recovery time 2

Legend

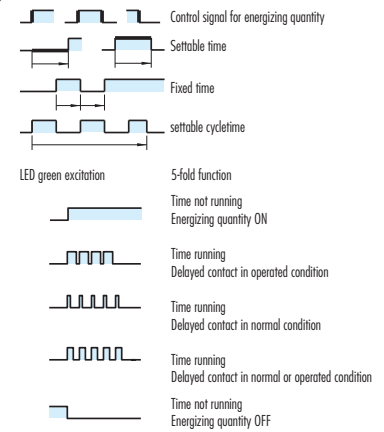

Features

Setting the time delay

The time range is set with the RANGE selector switch and displayed in the window next to it. The required delay time is set with a setting wheel.

LEDs show the state of the excitation input and the position of the contacts. You can monitor the countdown on a flashing LED.

Note

The device is designed for multi-voltage. Connect phase L1 or L+ to terminal A1 and neutral N or M to terminal A2.

You can change the delay time during operation. The change is effective immediately.

Technical data

Device type	NGZ 71																								
Product norm (Time relays)	EN 61812 - 1:1999 - 08																								
Relay function according to IEC 60050	445 - 01 - 02																								
Function diagram	FD 250 - 1																								
Function display	2 LEDs green																								
Ambient operating temperature range	-25 to + 60 °C																								
Input circuit																									
Rated voltage A1 - A2	AC/DC 24 to 240 V																								
Rated power AC	3.5 VA/1.7 W																								
Rated power DC	1.6 W																								
Rated voltage limits	70 to 110 %																								
Rated frequency f_n	50 to 60 Hz \pm 5 %																								
Release value of input voltage (line capacitance approx. 150 pF/m)	\geq AC/DC 10 V; permissible line capacitance 0.2 μ F																								
Parallel load permitted	A1 - A2 yes																								
Internal one-way rectifier	A1 - A2 no																								
Time circuit																									
Time setting / number of time ranges	analog/16																								
Setting ranges for time delay	from \leq 0.1 s to 300 h divided into:																								
	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%;">\leq 0.1 to 1 s</td> <td style="width: 33%;">1.5 to 30 min</td> <td style="width: 33%;"></td> </tr> <tr> <td>0.15 to 3 s</td> <td>3 to 60 min</td> <td></td> </tr> <tr> <td>0.5 to 10 s</td> <td>5 to 100 min</td> <td></td> </tr> <tr> <td>1.5 to 30 s</td> <td>0.15 to 3 h</td> <td></td> </tr> <tr> <td>5 to 100 s</td> <td>0.5 to 10 h</td> <td></td> </tr> <tr> <td>15 to 300 s</td> <td>1.5 to 30 h</td> <td></td> </tr> <tr> <td>0.5 to 10 min</td> <td>5 to 100 h</td> <td></td> </tr> <tr> <td>50 to 1000 s</td> <td>15 to 300 h</td> <td></td> </tr> </table>	\leq 0.1 to 1 s	1.5 to 30 min		0.15 to 3 s	3 to 60 min		0.5 to 10 s	5 to 100 min		1.5 to 30 s	0.15 to 3 h		5 to 100 s	0.5 to 10 h		15 to 300 s	1.5 to 30 h		0.5 to 10 min	5 to 100 h		50 to 1000 s	15 to 300 h	
\leq 0.1 to 1 s	1.5 to 30 min																								
0.15 to 3 s	3 to 60 min																								
0.5 to 10 s	5 to 100 min																								
1.5 to 30 s	0.15 to 3 h																								
5 to 100 s	0.5 to 10 h																								
15 to 300 s	1.5 to 30 h																								
0.5 to 10 min	5 to 100 h																								
50 to 1000 s	15 to 300 h																								
Recovery time 1/2	\leq 50/ \leq 50 ms																								
Minimum ON time 1/2	- / - ms																								
Setting tolerance	\leq \pm 5 %																								
Repeatability (to set value)	\leq \pm 0.01 % + \pm 10 ms																								
Influence of temperature (within range)	\leq \pm 0.002 %																								
Influence of voltage (within range)	\leq \pm 0.002 %																								
Output circuit																									
Contact equipment	1 changeover contact																								
Contact material	AgNi 90/10																								
Rated operating voltage	AC/DC 24 to 240 V																								
Rated value for limiting continuous current I_{th}	5 A																								
Minimum contact load	\geq AC/DC 5 V/ \geq 10 mA																								
Utilization category according to IEC 60947 - 5 - 1	AC-15 U_e AC 230 V, I_e 3 A DC-13 U_e DC 24 V, I_e 2 A																								
Permissible switching frequency	\leq 3600 switching cycles/h																								
Mechanical service life	30 x 10 ⁶ switching cycles																								
Electrical service life 20/2 A, AC 250 V, $\cos \varphi = 0.3$	0.12 x 10 ⁶ switching cycles AC-15																								
Operate time / release time for excitation A1 - A2	40 ms																								
Other data																									
Clearance/creepage distances to IEC 60664 - 1																									
Contamination level	3 outside, 2 inside																								
Overvoltage category	III																								
Rated voltage	AC/DC 275 V																								
Protection class housing / terminals acc. to IEC 60529	IP 40/IP 20																								
Interference immunity acc. to IEC 61000 - 4	Test level 3																								
Dimensions (housing)	K 3 -1																								
Terminal connection diagram	KS 250 -1																								
Connection cross sections single or fine wire fine wire with connector sleeve	1 x 0,2 to 6 or 2 x 0,2 to 2,5 mm ² 1 x 0,4 to 4 or 2 x 0,2 to 1,5 mm ²																								
Weight	0.1 kg																								
General Technical Specifications	NGG Catalogue																								